


## Data sheet

# Gasketed Plate Heat Exchangers (DN 250 / 10") S67 / S113 / S155

## Description

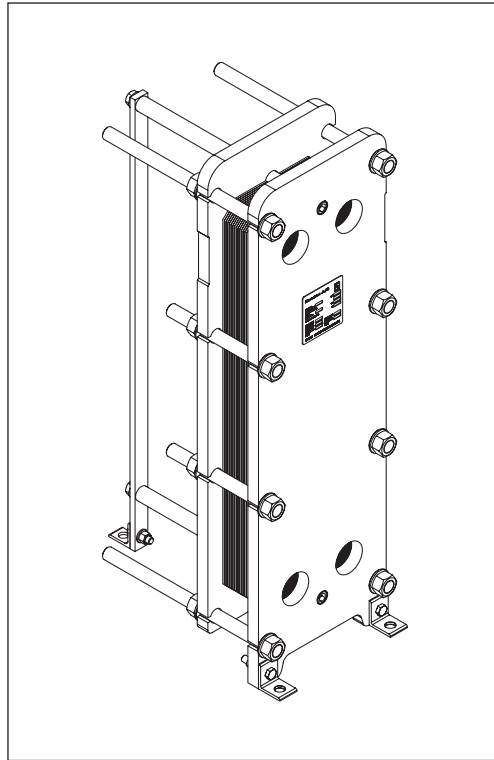

SONDEX® gasketed plate heat exchangers are the ideal choice for a wide range of applications across numerous market segments.

We have the largest plate portfolio in the world, and we customize each heat exchanger to meet your exact requirements. Innovative technologies and smart design make our gasketed plate heat exchangers a stellar investment.

**Benefits:**

- Individually customized solution that perfectly matches your requirements and lowers your energy consumption.
- High performance and a low pressure drop eliminate unnecessary burdens on your system and optimize overall system performance.
- The design results in a compact solution with a small footprint, simple installation, and easy access for maintenance.

**Common applications:**

- HVAC industry
- Marine/offshore industry
- Dairy/food/beverage industry
- Sugar industry
- Biogas industry
- Pulp and paper industry
- Heavy industry
- Mining industry
- Petrochemical industry
- Chemical industry

**Main data:**

- Min. temperature  $-10^{\circ}\text{C}$
- Max. temperature  $180^{\circ}\text{C}$
- Max. working pressure 16 / 25 bar (10 bar on request)
- Water and different fluids, steam
- Connection size DN 250 or 10"

**Approvals:**


- Please contact your local Danfoss/SONDEX® sales representative for an overview of the available approvals in your region

**Construction standard:**

- EN13445 (PED 2014/68/EU)
- ASME sec VIII, Div. 1

**Naming of units**

**S67-IS16-21-TKTL89**

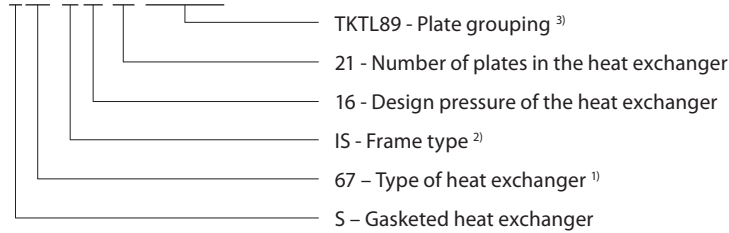

**<sup>1)</sup> Type of heat exchanger:**

67 - ...  
 Letter S67 shows type of the attachment of gasket to plate:  
 e.g. 67 (without A) – SonderLock  
 67A (with A) – Hang-on

**<sup>2)</sup> Description of frame types:**


There are few different frame types which can be offered for different applications and duties.  
 IS – with suspension roller,  
 IG – without suspension roller,  
 FS – food/sanitary with suspension roller,  
 FG – food/sanitary,  
 ST – simple design of frame with threaded connections

**<sup>3)</sup> Channel grouping:**

In this example, the heat exchanger combines TK and TL channels. The share of TL channels equals 89% of the total number of channels.  
 The number of channels is defined as “the number of plates - 1”.  
 TK - short thermal length  
 TM - medium thermal length  
 TL - long thermal length


**Heat exchanger design**

**Gasketed heat exchangers consist of**

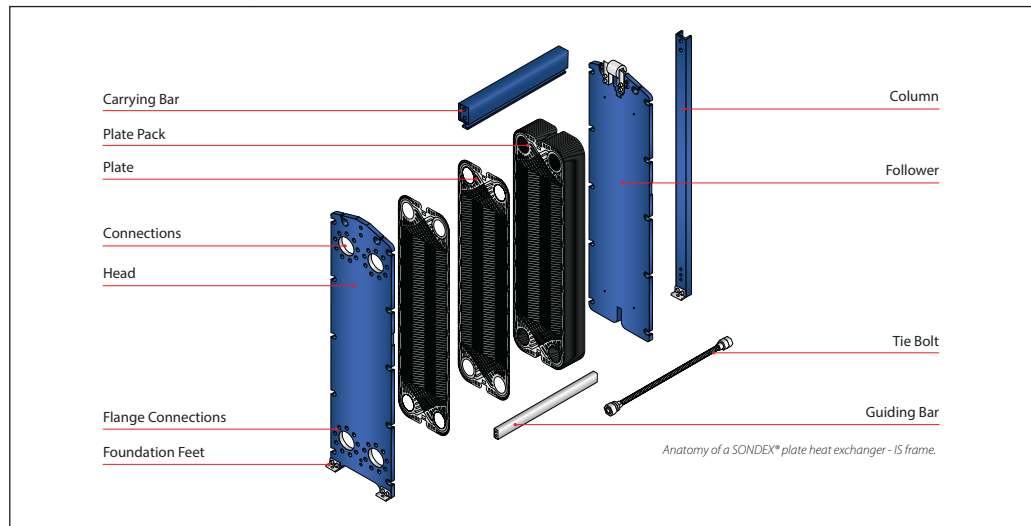

**Heat exchanger design**  
(continued)


**Multi-pass design**

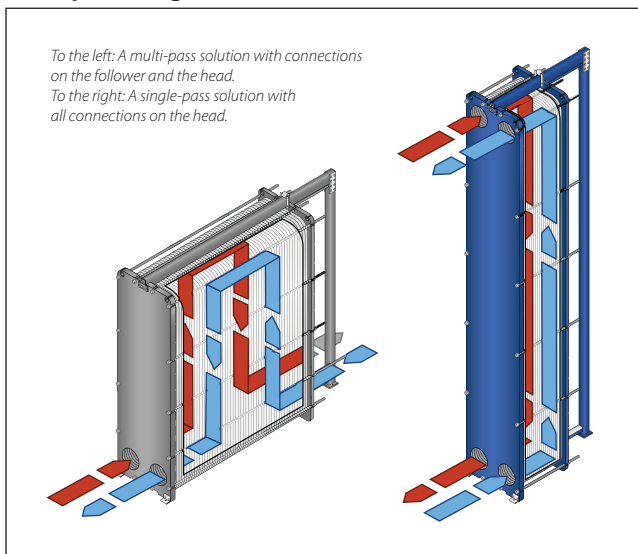

**Connections**

The heat exchanger may have connections on both front and back-end sides of the unit.

Connections on the front-end plate are marked with F and connections on the back-end plate are marked with B. The numbers 1, 2, 3 and 4 designate the position of the connection on the end-plate from the top-left port clockwise.

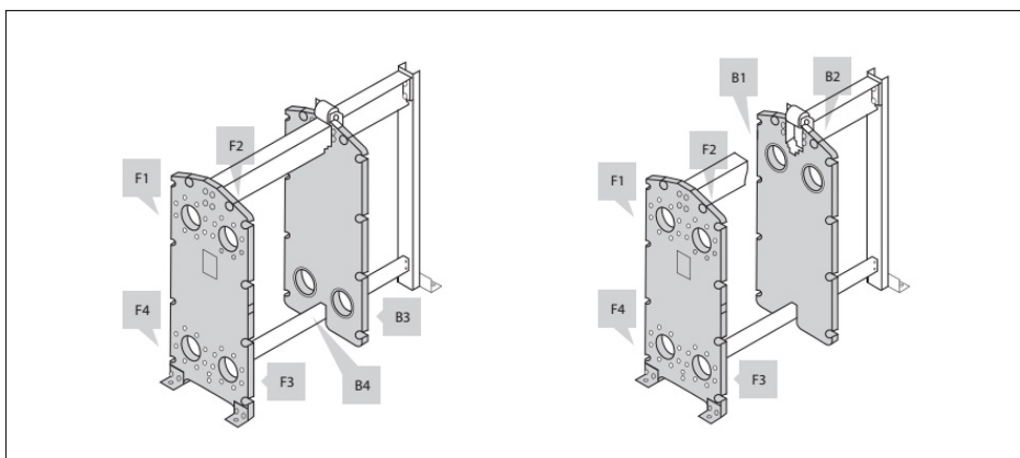

Technical data

Heat exchanger **S67 / S113 / S155**


Type		S67	S113	S155
Max. working pressure	PN (bar)	(10) <sup>1)</sup> , 16, 25		
Max. operating temperature	°C	Up to 180		
Min. operating temperature		-10		
Flow medium		Water and different fluids, steam		
Volume / channel	l	1.8	3.6	4.7
Connection size		DN 250 / 10"		
Connection type		• DN 250/10" flanges. Carbon steel, rubberlined or clad with AISI 316L (other materials available on request)		
Plate material		Stainless steel EN 1.4404 (AISI 316L), EN 1.4301 (AISI 304), SMO254, Hastelloy C276, titanium Gr.1 Other materials available on request		
Plate thickness	mm	0.4; 0.5; 0.6 2 x 0.4 SonderSafe plates <sup>2)</sup> Other thicknesses available on request		
Gasket material		NBR, EPDM, Other materials available on request		
Gasket attachment type		Sonder Lock		
Liners in connections		• Rubber NBR, EPDM, • Stainless steel EN 1.4404 (AISI 316L), EN 1.4301 (AISI 304), SMO254, Hastelloy C276, titanium Gr.1		
Frame		• Painted frame, color RAL 5010 (other colors available on request) • Stainless steel frame, designed for the sanitary applications (e.g. food and dairy industries)		
Frame painting specification		Painting available for corrosion categories C2L, C4M, C5M		

<sup>1)</sup> Not available for all frame variations

<sup>2)</sup> SonderSafe - double plate

Using the right plate for each individual duty is very important, as it greatly impacts the efficiency of the entire installation. It is important that the length of the plates and the type of pattern match the requirements of individual thermal duty. We have developed a wide plate portfolio to provide the perfect plate and connection size for any duty. No application is too small or too big for us - we provide the optimal technical solution every time.

Our extensive SONDEX® plate portfolio includes plates that lie outside the commonly manufactured plate sizes to cover all thermal duties optimally.

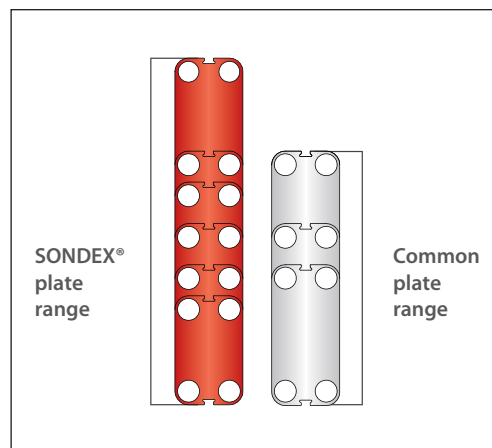

Accessories

**Insulation**

*Recommended applications:*

The insulation jacket for the plate heat exchanger is used in different applications with high temperatures and cooling systems.

Application	Heating	Cooling
Material	45 mm mineral wool Not flammable DIN EN 4102A2	40 mm PU-foam DIN 4102-1 B2
Outer cap	1 mm aluminium "Stucco" Embossed	
Internal insulation	0.05 mm aluminium foil	
Panel fixation	Plastic rivets	
Temperature	20 ... 200 °C	-50 ... -80 °C
U-value	0.55 W/m <sup>2</sup> K	0.38 W/m <sup>2</sup> K
Insulation class	3 <sup>1)</sup>	4 <sup>1)</sup>
Heat loss	17.1 W/m <sup>2</sup>	-

**Please note:**

*Inlet and outlet temperatures in the exchanger have been based on 90/50 – 30/70 °C.*

<sup>1)</sup> *The loss of heating/cooling is stated per m<sup>2</sup> surface on the insulation jacket.*

*The bottom of the heat exchanger is not insulated and this fact has been excluded.*

*A possible loss of ventilation, largely dependent on the mounting of the heat exchanger, has not been taken into account either.*

**Drip trays**


*Recommended applications:*

The drip tray is available in two types. A "fail-safe" solution which prevents water or liquid from leaking onto the floor, or when the heat exchanger is dismantled, or opened for inspection and maintenance. And an insulated drip tray for cooling applications, which collects condensate formed outside of the plate heat exchanger.

*Materials*

Drip tray consists of:

- 1 mm galvanized steel frame
- Hanging brackets in galvanized steel
- 60 mm Polyurethane insulation for cooling applications
- Draining valve.

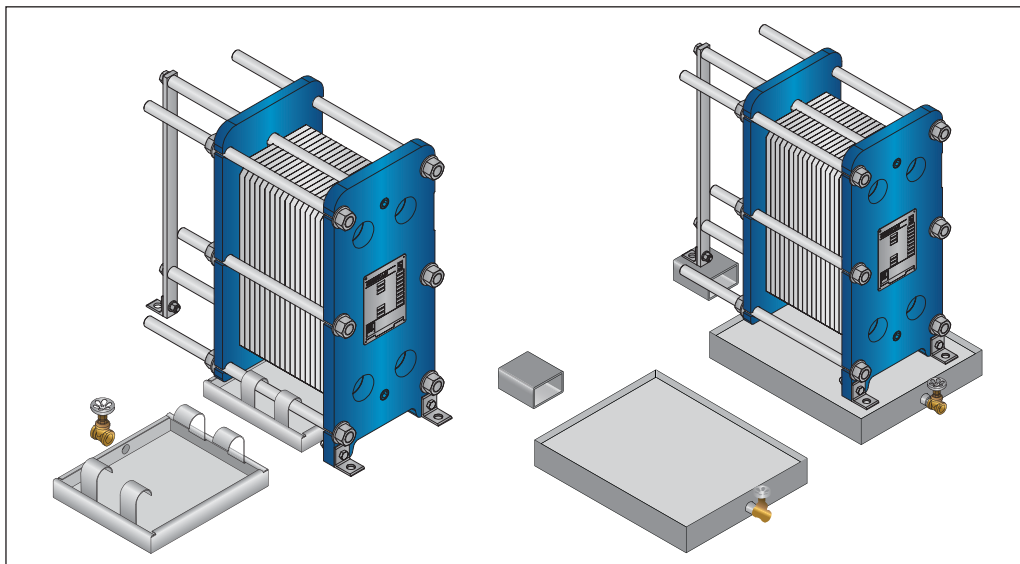

**Spare parts**

Spare parts for gasketed heat exchangers, such as plates, gaskets, frame parts can be ordered for maintenance, repair, increasing heat exchanger capacity, etc.

Please contact your local Danfoss or SONDEX® sales representative to provide you with information on spare parts available for gasketed heat exchangers.

**Selection and ordering**


Please contact your local SONDEX® or Danfoss sales representative for the selection and / or ordering of the heat exchangers, spare parts, and accessories.

For contact information please visit <https://www.danfoss.com/en/contact-us>.

**Dimensions**  
Non-sanitary applications

Any connection can be used for primary side in.  
All the rest are made correspondingly.

**S67 frames**

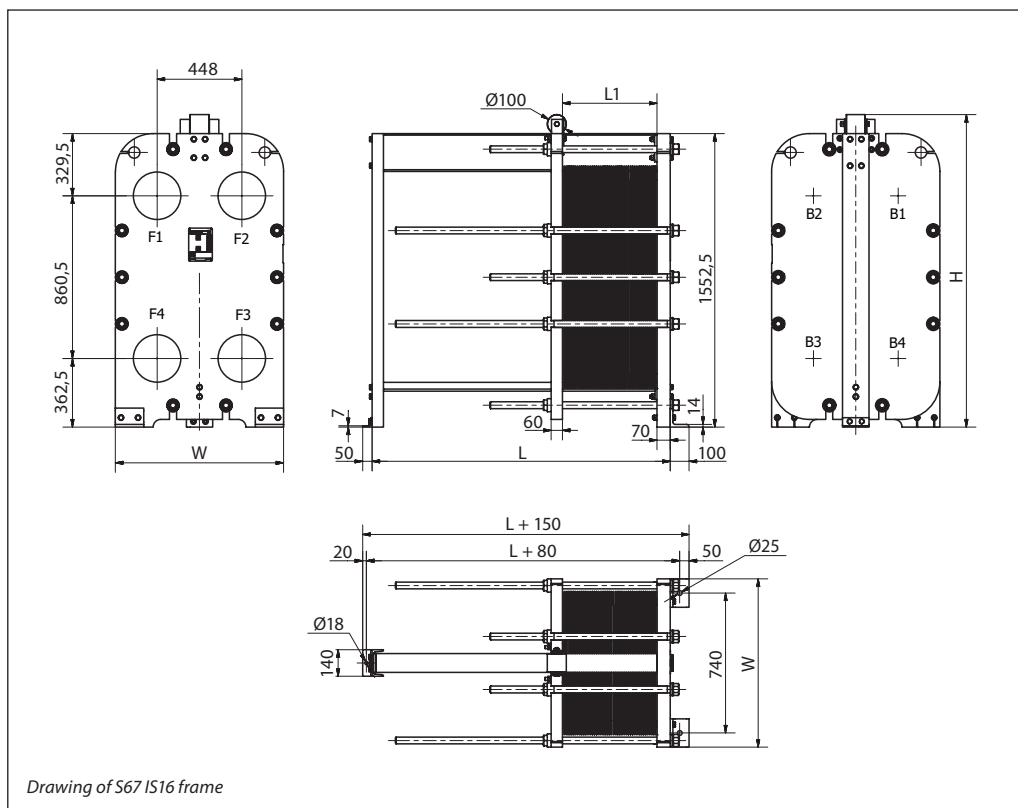

Drawing of S67 IS16 frame

Number of plates <sup>1)</sup>	L (frame length) (mm)	W (mm)	H (mm)	Weight max, empty <sup>2)</sup> (kg)	Connection type
<b>S67 IS16</b>					
8 – 80	1077	890 (35.04")	1652,5 (65.06")	1879	DN 250 flange or 10" flange
81 – 134	1377			2117	
135 – 170	1577			2279	
171 – 261	2077			2693	
262 – 352	2720			3120	
353 – 443	3220			3550	
444 – 625	4220		1705.5 (67.15")	4467	


<sup>1)</sup> the indicated maximum number of plates is based on the minimum plate thickness allowable for the PN level of the unit;

<sup>2)</sup> the maximum weight of the empty unit with the maximum allowable number of plates;

<sup>3)</sup> PN class 10 bar / 25 bar is available on request.

Dimensions (continued)  
Non-sanitary applications

S113 frames

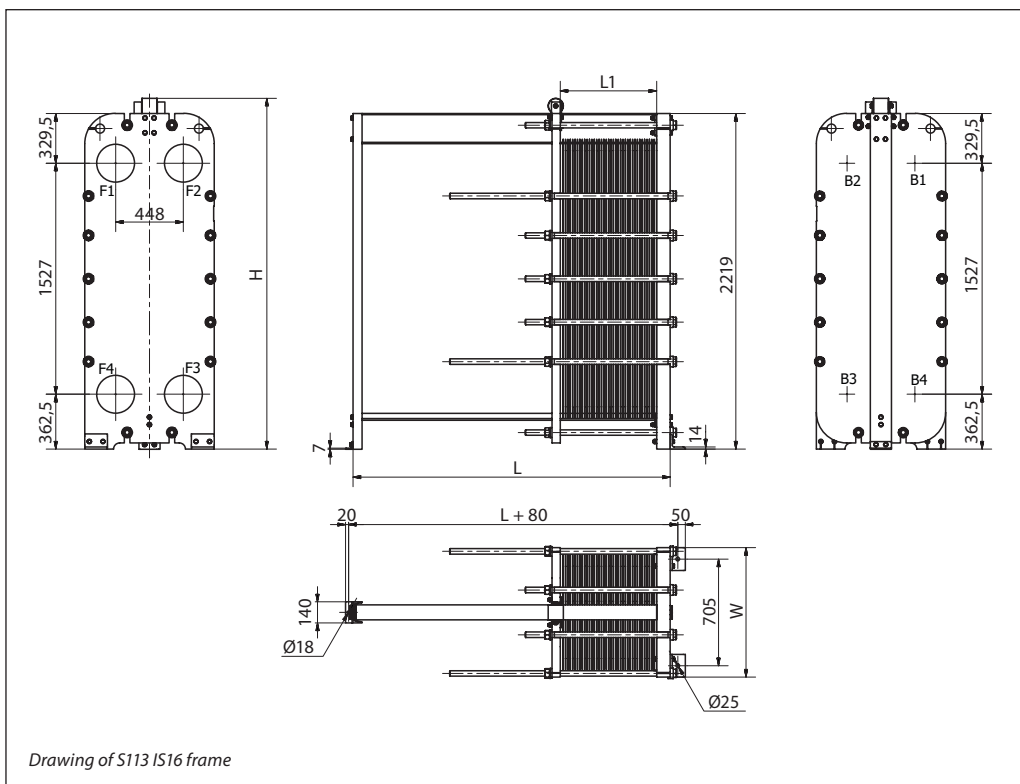


Number of plates <sup>1)</sup>	L (frame length) (mm)	W (mm)	H (mm)	Weight max, empty <sup>2)</sup> (kg)	Connection type
<b>S113 IS16</b>					
9 – 80	1097	855 (33.66")	2319 (91.30")	2636	DN 250 flange or 10" flange
81 – 135	1397			3017	
136 – 171	1597			3266	
172 – 262	2097		2372 (93.39")	3895	
263 – 353	2740			4525	
354 – 444	3240			5153	
445 – 626	4240			6412	
<b>S113 IS25</b>					
9 – 80	1097	920 (36.22")	2319 (91.30")	2724	DN 250 flange or 10" flange
81 – 133	1397			3150	
134 – 169	1597			3439	
170 – 258	2097		2372 (93.39")	4154	
259 – 343	2740			4841	
344 – 433	3240			5562	
434 – 611	4240			6992	

<sup>1)</sup> the indicated maximum number of plates is based on the minimum plate thickness allowable for the PN level of the unit;  
<sup>2)</sup> the maximum weight of the empty unit with the maximum allowable number of plates;  
<sup>3)</sup> PN class 10 bar is available on request.

Dimensions (continued)  
Non-sanitary applications

S155 frames

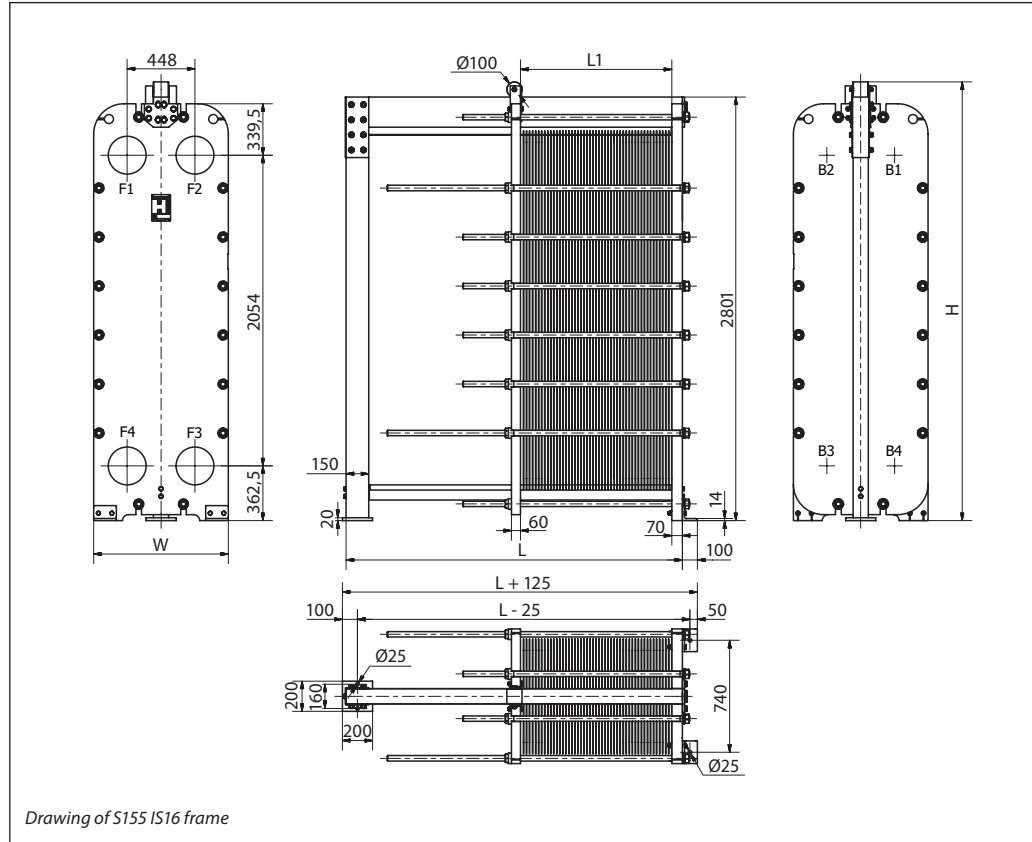

Drawing of S155 IS16 frame

Number of plates <sup>1)</sup>	L (frame length) (mm)	W (mm)	H (mm)	Weight max, empty <sup>2)</sup> (kg)	Connection type
<b>S155 IS16</b>					
7 - 34	820	890 (35.04")	2901 (114.21")	3345	DN 250 flange or 10" flange
35 - 107	1220			3965	
108 - 161	1520			4425	
162 - 198	1720			4739	
199 - 289	2220			5513	
290 - 380	2720			6286	
381 - 470	3220			7052	
471 - 652	4220			8600	
<b>S155 IS25</b>					
7 - 28	840	920 (36.22")	2901 (114.21")	4219	DN 250 flange or 10" flange
29 - 100	1240			4936	
101 - 153	1540			5465	
154 - 189	1740			5823	
190 - 278	2240			6709	
279 - 367	2740			7596	
368 - 457	3240			8492	
458 - 635	4240			10267	

<sup>1)</sup> the indicated maximum number of plates is based on the minimum plate thickness allowable for the PN level of the unit;

<sup>2)</sup> the maximum weight of the empty unit with the maximum allowable number of plates;

<sup>3)</sup> PN class 10 bar is available on request.